

# evers

## Scraper Blade



Complete  
program

# evers

## Scraper Blade

### **Evers Scraper Blade**

The robust Evers scraperblades are ideal for leveling of agricultural land and for clean scraping the farmyard and the roads around the yard and the fields. Also in snow or for maintenance of sand and gravel roads, the Evers scraperblades are the solution for making the terrain workable and passable. They are for use in the (front-) linkage of the tractor and are fast, easy and safe to connect and disconnect.

#### **Functional equipment**

The Evers scraperblades are characterized by the functional standard equipment which allows multifunctional use on the farm. Both mechanical and fully adjustable hydraulic versions are very solid machines and suitable for various purposes.

#### **Advanced options**

Evers offers the right machine for all applications. If you choose for convenience when used intensively, we recommend you type MS Proff. This version is standard with a heavier frame, a hydraulic cylinder to turn the blade 270° and a hydraulic cylinder to adjust the blade sideways. Due to the side adjustment you can also work outside the tracks of the tractor.

All occurring activities are easy to do because of the extremely solid construction. The working depth can be precisely set with the standard large support wheels. These stageless adjustable wheels can rotate 360° so you can work backwards and forwards and maneuver easily. The rotation of the blade also makes it possible to work backwards and forwards so you can easily and carefully use the machine from all sides.

Do you need to move more heavy material or to work under difficult conditions, then the "Proff" with the high blade (700mm) is the right machine. The aggressiveness of the operation of the blade against the ground you can change with the 3-hole angle-adjustment.


#### **Horizontal adjustment**

The Proff G version has an optional extra unique hydraulic adjustment on the 3-point. With this the horizontal angle of the scraperblade is adjustable and you can also twist the blade while working.

#### **Complete program**

For lighter work, choose the Evers scraperblade type MS. These versions have a lighter frame and smaller blade (600mm). The blade can rotate mechanical (270°) and has a mechanical side-adjustment. Also with this scraperblade you will get an excellent Evers product on farm.

Of course all Evers scraperblades have a strong construction and are equipped with a replaceable wear-strip from high quality hardened material, with a plain and a serrated edge. The blade has a sophisticated shape for optimum performance and the hinge points are equipped with a grease nipple.

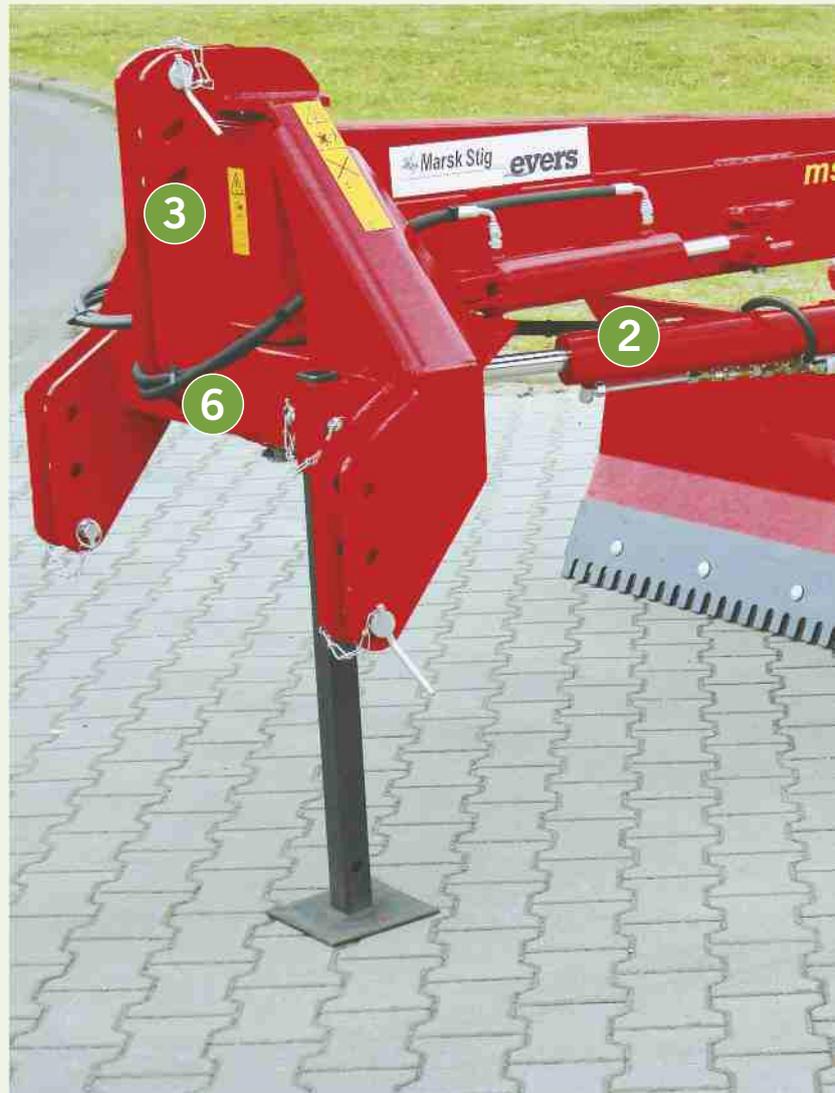

### **Functional equipment**

# 6

## strong

## features

Extremely solid construction of blade, swivel and boom.



Hydraulic adjustment of the blade, easy to control.



Works before and behind the tractor and outside the tracks of the tractor if necessary.



Easy to work under different conditions by simply adjusting the angle of the blade at Proff version.



Also suitable for working under inclination due to the hydraulic horizontal adjustment of the Proff G version.



Precise and easy maneuvering with the solid support wheels.



# MS PROFF: multifunctional

## Technical details

| Type            | Blade width | Blade height | Blade angle | Blade adjustment | Side adjustment | Horizontal adjustment | Wheels   | Weight in kg |
|-----------------|-------------|--------------|-------------|------------------|-----------------|-----------------------|----------|--------------|
| MS 250          | 250cm       | 600mm        | --          | Mech.            | Mech.           | --                    | Optional | 570          |
| MS 275          | 275cm       | 600mm        | --          | Mech.            | Mech.           | --                    | Optional | 600          |
| MS 2500 Proff N | 250cm       | 700mm        | 3-way       | Hydr.            | Hydr.           | --                    | Standard | 780          |
| MS 2750 Proff N | 275cm       | 700mm        | 3-way       | Hydr.            | Hydr.           | --                    | Standard | 820          |
| MS 3000 Proff N | 300cm       | 700mm        | 3-way       | Hydr.            | Hydr.           | --                    | Standard | 850          |
| MS 2500 Proff G | 250cm       | 700mm        | 3-way       | Hydr.            | Hydr.           | Hydr.                 | Standard | 790          |
| MS 2750 Proff G | 275cm       | 700mm        | 3-way       | Hydr.            | Hydr.           | Hydr.                 | Standard | 830          |
| MS 3000 Proff G | 300cm       | 700mm        | 3-way       | Hydr.            | Hydr.           | Hydr.                 | Standard | 860          |



- ✓ *Very solid construction.*
- ✓ *Blade in adjustable angle.*
- ✓ *Blade rotation, 270 degrees.*
- ✓ *Side adjustment blade.*
- ✓ *Solid boom and swivel.*
- ✓ *Standard replaceable hardened wear-strip with plain and serrated edge.*
- ✓ *Solid swiveling depth control wheels.*
- ✓ *Horizontal adjustment blade optional.*

**evers**  
*Solutions that work!*

### Evers Agro B.V.

Bedrijvenpark Twente 326

NL-7602 KL Almelo

T +31 546 644866

F +31 546 549912

E [info@eversagro.nl](mailto:info@eversagro.nl)

[www.eversagro.com](http://www.eversagro.com)